

FOCUS

FOODSERVICE

Item # _____

Job _____



STAINLESS STEEL Solid Shelving


- **Design:** The heavy-duty commercial grade solid stainless steel combined with the die-cast corners gives these shelves the strength and durability to handle almost any storage operation.
- **Versatile:** Our shelving can change as quickly as your needs change. By using various sizes, hundreds of shelving configurations become possible.
- **Fast and Secure Assembly:** Stainless steel posts with the double groove visual guide feature, have circular grooves at 1" (25mm) intervals and are numbered at 2" (50mm) intervals. A tapered split sleeve (plastic) snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves to lock on the shelf. Shelf is assembled in minutes without the use of any special tools.
- **Shelf Accessibility:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
- **Durable:** Constructed of Stainless Steel panel with die cast aluminum corners.
- **Adjustable Feet:** Bolt levelers compensate for uneven surfaces.
- **Strength:** Each shelf up to 48" in length is rated to support up to 800 lbs. of uniformly distributed weight. Shelves longer than 48" support 600 lbs.

STAINLESS STEEL SOLID SHELVES

STAINLESS STEEL SOLID SHELVING

Job _____

Solid Shelves

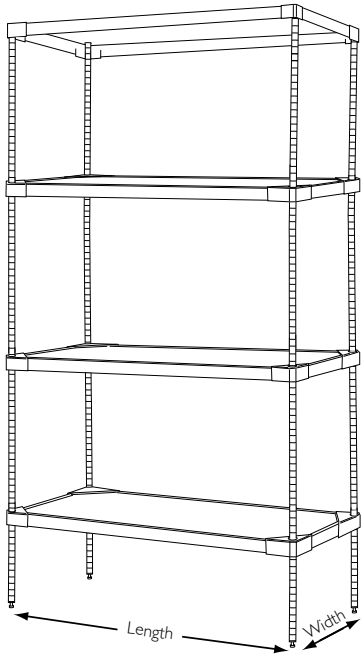

Item No. Solid Shelves	Description (in)	Width (in) (mm)		Length (in) (mm)		Weight/pc (lbs.)
FF1824SSS	18X24, Shelf	18	610	24	455	5.6
FF1830SSS	18X30, Shelf	18	760	30	455	7
FF1836SSS	18X36, Shelf	18	910	36	455	8.4
FF1842SSS	18X42, Shelf	18	1060	42	455	9.8
FF1848SSS	18X48, Shelf	18	1220	48	455	11.3
FF1860SSS	18X60, Shelf	18	1525	60	455	14.1
FF2424SSS	24X24, Shelf	24	610	24	610	16.9
FF2430SSS	24X30, Shelf	24	610	30	760	7.5
FF2436SSS	24X36, Shelf	24	610	36	910	9.4
FF2442SSS	24X42, Shelf	24	610	42	1060	11.3
FF2448SSS	24X48, Shelf	24	610	48	1220	13.1
FF2460SSS	24X60, Shelf	24	610	60	1525	15

Split Sleeves



Plastic split sleeves are provided with shelf. One bag required per shelf. Packed 4 sets per package.
Item No. 30058 Replacement sleeves.



Aluminum Split Posts
For high temperature, demanding or conductive applications. Zinc retainer ring. 4 sets per bag. 1 set required per shelf.
Item No. FFSALSLV

Posts

Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double grooved every 8" (203mm) for easy identification.



Item No. Epoxy	Description (in.)	Height (in.) (mm)		Weight/pc (lbs.)
FGN063SS	Post, 63 Mobile	63	1589	13.1
FG063SS	Post, 63 w/Foot	63	1589	13.1
FGN074SS	Post, 74 Mobile	74	1895	15.4
FG074SS	Post, 74 w/Foot	74	1895	15.4
FGN086SS	Post, 86 Mobile	86	2200	17.8
FG086SS	Post, 86 w/Foot	86	2200	17.8

FOCUS

FOODSERVICE

Item # _____

Job _____



STAINLESS STEEL Wire Shelving

- **Design:** The open wire design of these heavy gauge stainless steel coated shelves minimizes dust accumulation and allows a free circulation of air, greater visibility of stored items and greater light penetration.
- **Versatile:** Our shelves can change as quickly as your needs change. By using various sizes, hundreds of shelving configurations become possible.
- **Fast and Secure Assembly:** Posts with the double groove visual guide feature, have circular grooves at 1" (25mm) intervals and are numbered at 2" (50mm) intervals. A tapered split sleeve (plastic) snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves to lock on the shelf. Shelf is assembled in minutes without the use of any special tools.
- **Shelf Ribs:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
- **Durable:** Constructed of 201 stainless steel wire.
- **Adjustable Feet:** Bolt levelers compensate for uneven surfaces.
- **Strength:** Each shelf up to 48" in length is rated to support up to 800 lbs. of uniformly distributed weight. Shelves longer than 48" support 600 lbs.

STAINLESS STEEL WIRE SHELVES

STAINLESS STEEL WIRE SHELVING

Job _____

Wire Shelves



Item No. Wire Shelves	Description (in)	Width (in) (mm)		Length (in) (mm)		Weight/pc (lbs.)
FF1824WRSS	18X24, Shelf	24	610	18	455	5.6
FF1830WRSS	18X30, Shelf	30	760	18	455	7
FF1836WRSS	18X36, Shelf	36	910	18	455	8.4
FF1842WRSS	18X42, Shelf	42	1060	18	455	9.8
FF1848WRSS	18X48, Shelf	48	1220	18	455	11.3
FF1860WRSS	18X60, Shelf	60	1525	18	455	14.1
FF1872WRSS	18X72, Shelf	72	1825	18	455	16.9
FF2424WRSS	24X24, Shelf	24	610	24	610	7.5
FF2430WRSS	24X30, Shelf	24	610	30	760	9.4
FF2436WRSS	24X36, Shelf	24	610	36	910	11.3
FF2442WRSS	24X42, Shelf	24	610	42	1060	13.1
FF2448WRSS	24X48, Shelf	24	610	48	1220	15
FF2460WRSS	24X60, Shelf	24	610	60	1525	18.8
FF2472WRSS	24X72, Shelf	24	610	72	1825	22.5

Split Sleeves



Plastic split sleeves are provided with shelf. One bag required per shelf. Packed 4 sets per package.
Item No. 30058 Replacement sleeves.



Aluminum Split Posts
For high temperature, demanding or conductive applications. Zinc retainer ring. 4 sets per bag. 1 set required per shelf.
Item No. FFSALSLV

"S" Hooks

Used to "add-on" shelving units with only two posts required.
Item No. 93333 Chromate
Item No. 93333GN Green Epoxy



Posts

Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double grooved every 8" (203mm) for easy identification.



Item No. Epoxy	Description (in.)	Height (in.) (mm)		Weight/pc (lbs.)
FGN063SS	Post, 63 Mobile	63	1589	13.1
FG063SS	Post, 63 w/Foot	63	1589	13.1
FGN074SS	Post, 74 Mobile	74	1895	15.4
FG074SS	Post, 74 w/Foot	74	1895	15.4
FGN086SS	Post, 86 Mobile	86	2200	17.8
FG086SS	Post, 86 w/Foot	86	2200	17.8